



## Product installation steps:

①

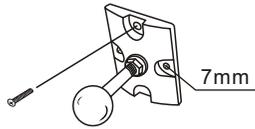


1. The mounting brackets by icons on the wall with screws.

②




2. The word screwdriver bolt icon to insert the location of the bolt down onto the top.

③




3. The net cast out of the LOGO signs.

④




4. Will be provided with the product Hexagon Wrench insert LOGO just out of position, The back of the slow rotation of the mounting hole release Clamp.

⑤



5. The product installed on the stent.

⑥

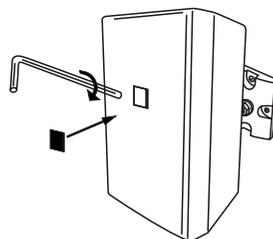

6. Hexagon Wrench used to clamp a little tight solid product, and then to the product required direction, and then to fully clamp fastening, LOGO will be back in situ marker.

# Wall Mount Speaker



# itc

Please follow the instructions in this manual to obtain the optimum results from this unit.  
We also recommend that you keep this manual handy for future reference.

## Readers :


Indoor Mount speaker provides the public places with the background music, broadcast and fighting alarm. It is widely applicable for the restaurant, commercial mansion, factory, commercial districts, square, school, supermarket, snack bar etc.

## Safety Tips:

- Please be sure to use the former Reading detailed notes.
- Really pay attention to this manual and a safety with the important warning.
- Recommend that you keep this manual for future reference.

## Common warning signs and security :

The manual shown warning signs and security is to prevent the improper operation due to personal injury arising from the and loss of property, please read before using this product must understand that this manual security symbols and Warning to indicate fully aware of potential risks.



## When installed loudspeakers :


- Definitely will not be allowed to speakers and any exposure in the rainwet or water, may be inconsistent with , or fire.
- Restricted by the provisions of the speakers on the voltage, such as the use of high voltage may cause electric shock or fire disaster. Is no pruning, distorted, or replacement of damaged wires.
- Avoid instability in the installation or set up speakers, such as shaking the table or flat surface, The speaker can avoid falling caused personal injury or property damage.
- Speakers will be installed in support of the speaker or the weight of a solid shelf. Speaker swap can be avoided caused personal injury or property damage.
- Wet hands must not be admitted into or plugs, may lead to electric shocks.
- The allocation of plugs, make sure that pull plugs, rather than pull wires. the use of a damaged power line of machinery may cause fire or electric shock.
- Mobile speaker, you plug the prior allocated. If the speaker and plugs may be moving together will cause fire or electric shock. For plugs, identified as plugs for grip.
- Avoid speakers installed in the humidity or dust, direct contact with the sun, from the near-electric, or smoke or steam, may cause fire or electric shock.

## Descriptions:

Single 18-inch low-speakers, the use of net enclosures used (black / white) low-loss speaker rough surface reticulate network, the appearance of significant zhuo The atmosphere, but also a more transparent sound quality, purity. Stiffness to provide full, strong bass rhythms, specifically for small Disco-type systems.

## Connection:

The speaker's "+" side (red) with the power of the "+" side (red) to connect, "-" terminal (black) and the power of "-" Terminal (black) connection.

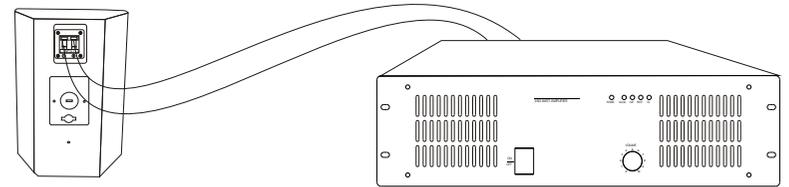

Then after a good line, should be the volume of power to minimize twisting, and then open the amplifier, select the appropriate program source, the volume can be opened to the appropriate location.

## Specifications:

Model	TS-9/9W
Power Taps@100V	5W, 10W, 20W, 40W, 80W
Power Taps@70V	2.5W, 5W, 10W, 20W, 40W
Impedance	Black: COM, Red: 2K $\Omega$ /1K $\Omega$ /500 $\Omega$ /250 $\Omega$ /125 $\Omega$ /8 $\Omega$
Sensitivity	94dB
Freq response	100Hz-17KHz
Dim	280 × 225 × 375mm
N.W	6.2Kg