



### Descriptions

VA-6000T is to work with VA-6000MS and detect the speaker loop working status, not to be influenced by the BGM signal, no need outer power supply, easy installation.

### Basic Functions

- Integrated aluminum body, elegant appearance.
- No need outer power supply, easy installation and wiring.


### Features

- \* To be installed at the end of each speaker loop, work with VA-6000MS to detect the status of the speaker loop.
- \* 1 unit for each loop, with rotary address switch to avoid operation mistakes.

### Specifications

<b>Model</b>	<b>VA-6000T</b>
AC power	
Voltage	12 DC, $\pm 3\%$
MAX Current	$< 0.1A$
Power consumption	$< 1W$
Machine Index	
Dimension	156 x 32 x 93mm
N.W	About 1.0 kg.
Installation	Desktop or Wall mounted
Color	Black
Environment Requirements	
Operation Temp	$+5^{\circ}C \sim +40^{\circ}C$
Storage Temp	$-20^{\circ}C \sim +70^{\circ}C$
Relative Temp	$< 95\%$ (No condensation)

### VA-6000T Front Panel <<

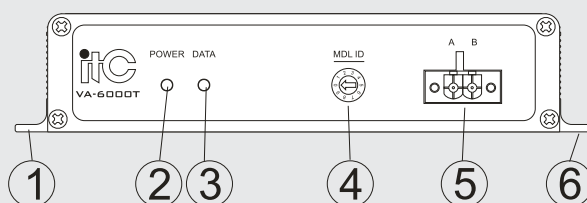

### Connectors

- 1 6 Installation Holes.
- 2 Power Indicator.
- 3 Status Indicator.
- 4 Equipment address.
- 5 Speaker loop interface.