

## Readers

---

---

Dear customers, your use of the broadcasting company speaker series. We would like to extend my heartfelt thanks to all of the Company manufactured products have been tested before, the commitment to keep its quality. Loud - speakers broadcast Pan-for hotels, commercial buildings, supermarkets, schools, leisure and entertainment venues, is your ideal choice. For your installation, commissioning and use of this product, the installation please read this note.

## Safety Tips


---

---

- Please be sure to use the former reading detailed notes.
- Really pay attention to this manual and a safety with the important warning.
- Recommend that you keep this manual for future reference.

### Common warning signs and security

The manual shown warning signs and security is to prevent the improper operation due to personal injury arising from the loss of property, please read before using this product must understand that this manual security symbols and Warning to indicate fully aware of potential risks.

 **Warning** Such as the inappropriate use of staff will cause injury, death and property damage.

### When installed loudspeakers

- Restricted by the provisions of the speakers on the voltage, such as the use of high voltage may cause electric shock or fire disaster. Is no pruning, distorted, or replacement of damaged wires.
- Avoid instability in the installation or set up speakers, such as shaking the table or flat surface, the speaker can avoid falling caused personal injury or property damage.
- Speakers will be installed in support of the speaker or the weight of a solid shelf. Speaker swap can be avoided caused personal injury or property damage.
- Wet hands must not be admitted into or plugs, may lead to electric shocks.
- The allocation of plugs, make sure that pull plugs, rather than pull wires. The use of a damaged power line of machinery may cause fire or electric shock.
- Mobile speaker, you plug the prior allocated. If the speaker and plugs may be moving together will cause fire or electric shock. For plugs, identified as plugs for grip.
- Will not be allowed to speakers on the vent cover. May cause internal heating caused by the fire.
- Avoid speakers installed in the humidity or dust, direct contact with the sun from the near-electric, or smoke or steam, may cause fire or electric shock.

itC

# Column Speaker

---


---




**T-301/302/303/304**

**OWNER'S MANUAL**

## Dimension

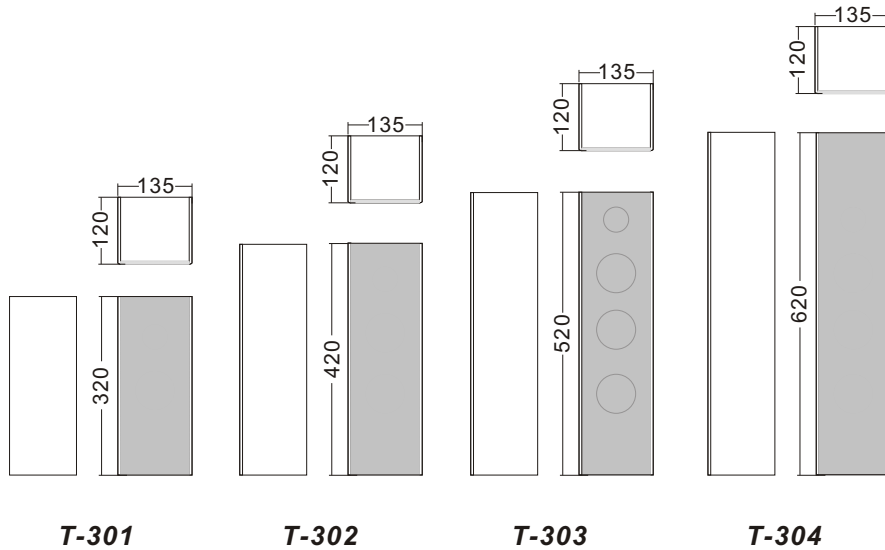

## Instanation

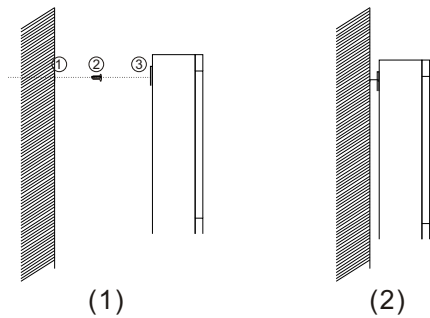

(1) Select the screw must suitable for the back side fixed hole size, twist the screw hole in the wall, put the screw into the opening hole site, fix the speaker in the screw.

(2) Finish the installation.

## Specifications

Model	T-301	T-302	T-303	T-304
Power Taps@100V	10W	20W	30W	40W
Power Taps@70V	5W	10W	15W	20W
SPL(1W/1M)	89dB ± 3dB	91dB ± 3dB	92dB ± 3dB	93dB ± 3dB
Impedance	Black: COM Red: 1KΩ	Black: COM Red: 500Ω	Black: COM Red: 330Ω	Black: COM Red: 250Ω
Freq Resp	130-18KHz	130-18KHz	130-18KHz	130-18KHz
Dimensions(mm)	135X120X320	135X120X420	135X120X520	135X120X620
Weight	2.6Kg	3.4Kg	4.4Kg	5.2Kg

## Label stickers

