

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 5" full range speaker unit
- Power taps 0.75w-1.5w-3w-6w @100V
- Wooden enclosure and fabric mask in black
- Easy and fast hook wall mount installation

Description

The T-601L is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 5" full range speaker driver is designed of wide frequency response 100-16kHz, the multiple power taps 0.75W, 1.5W, 3W & 6W are helpful for different applications varies from room size and ambient noise surroundings.

The wooden enclosure and fabric mask are of black color. Easy and secure wall mount installation through the supplied mounting hook.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




Specification

Model	T-601L
Power Taps @100V	0.75W, 1.5W, 3W, 6W
Power Taps @70V	0.38W, 0.75W, 1.5W, 3W
Impedance	Black: Com Blue:13.3KΩ Yellow:6.7KΩ White:3.3KΩ Green:1.7KΩ
SPL(1W/1M)	92dB
Max. SPL (Rated W/1M)	100dB
Frequency Response (-10dB)	100-16KHz
Finish	Baffle: Wooden, Black Grille: Cloth, Black
Speaker Driver	5" x 1
Dimensions	200 x 105 x 250mm
Weight	1.9Kg
Mounting	Hook

Appearance:



Direction Diagram:

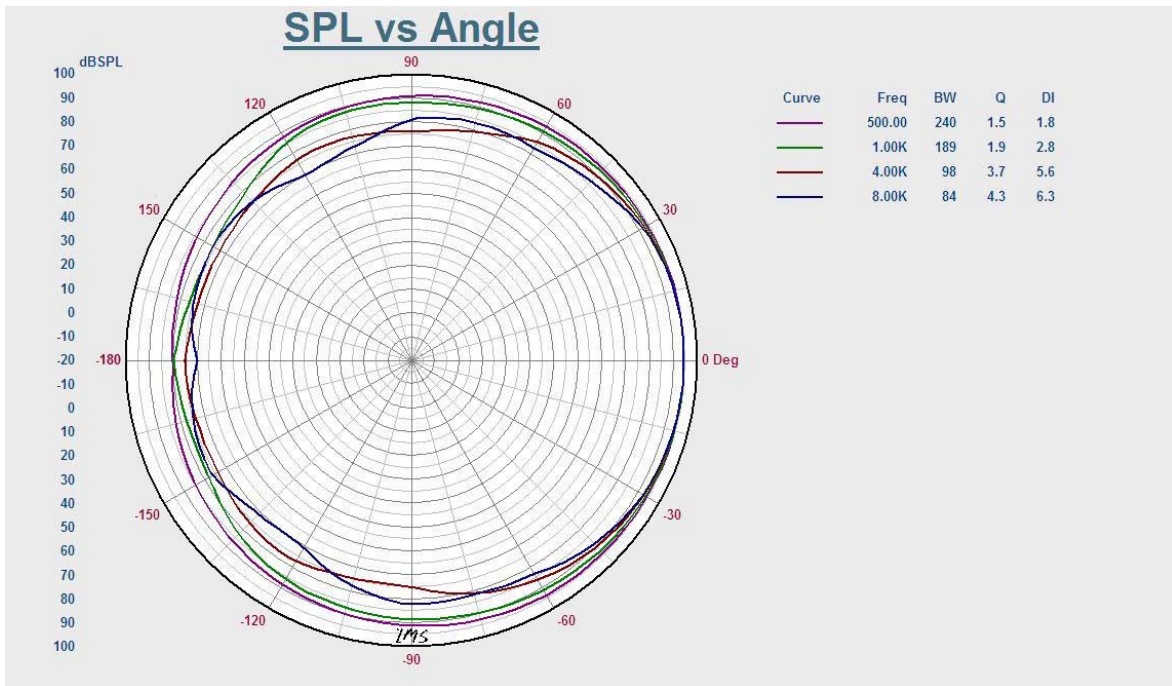

Frequency Response:

